


MEDIUM AUTO LINK 32V

Bussmann / Pacific
Slow Acting

Part Number	Ampere Rating	Body Colour
FSF030	30A	Pink 
FSF040	40A	Green 

I.R.: 1000A at 32VDC


Voltage: 32VDC

Features: Element window

Pack Size: 1, 10, 100

Notes: Not recommended for new designs.





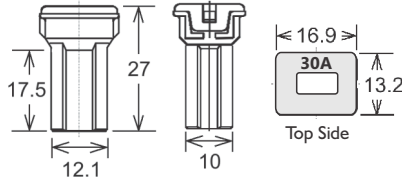



Approvals: ISO 8820 / JASO D612 




Dimensions in MM

LARGE AUTO LINK 32V

Bussmann / Pacific
Slow Acting

Part Number	Ampere Rating	Body Colour
ASF020	20A	Lt. Blue 
ASF030	30A	Pink 
ASF040	40A	Green 
ASF050	50A	Red 
ASF060	60A	Yellow 
ASF070	70A	Brown 
ASF080	80A	Black 
ASF100	100A	Blue 

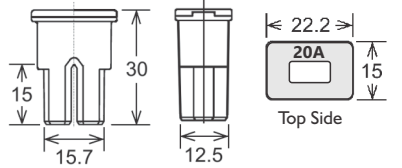

Dimensions in MM

I.R.: 1000A at 32VDC

Voltage: 32VDC

Features: Element window

Pack Size: 1, 10, 100

Approvals: ISO 8820 / JASO D612 







Spare Pack (SP):


Contain 1pc of one rating.

Time Characteristic % of Amp Rating	Opening Time Minimum / Maximum	
	110%	100 hrs
200%	5 sec	100 sec
350%	0.2 sec	7 sec
600%	0.04 sec	1 sec

AUTO LINK WITH LOCK 32V

Bussmann / Pacific
Slow Acting

Part Number	Ampere Rating	Body Type	Body Colour
	SHF025	25A	Small
SHF030	30A	Small	Lt. Green 
LHF045	45A	Large	Red 
LHF065	65A	Large	Black 
LHF075	75A	Large	Grey 

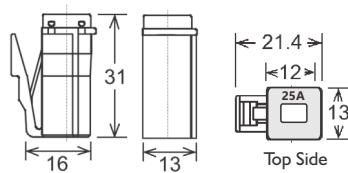

Small Body
25A to 30A

I.R.: 1000A at 32VDC

Voltage: 32VDC

Features: Element window

Pack Size: 1, 10, 100


Notes: Not recommended for new designs.

Approvals: ISO 8820 / JASO D612 



Spare Pack (SP):

Contain 1pc of one rating.

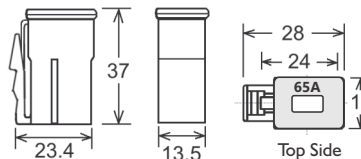

Large Body
45A - 75A

Dimensions in MM